

# C57.12.59™

## IEEE Guide for Dry-Type Transformer Through-Fault Current Duration

**IEEE Power Engineering Society**

Sponsored by the  
Transformers Committee



Published by  
The Institute of Electrical and Electronics Engineers, Inc.  
3 Park Avenue, New York, NY 10016-5997, USA

10 January 2002

Print: SH94979  
PDF: SS94979

*Recognized as an  
American National Standard (ANSI)*

IEEE Std C57.12.59™-2001

# IEEE Guide for Dry-Type Transformer Through-Fault Current Duration

*Sponsor*

**Transformers Committee  
of the  
IEEE Power Engineering Society**

*Approved 30 April 2002*

**American National Standards Institute**

*Approved 6 December 2001*

**IEEE-SA Standards Board**

**Abstract:** *This guide sets forth recommendations believed essential for the application of overcurrent protective devices that limit the exposure time of dry-type transformers to short-circuit currents. This guide is not intended to imply overload capability.*

**Keywords:** *dry-type transformers, normal base current, overcurrent protective devices, transformer short-circuit impedance*

---

*The Institute of Electrical and Electronics Engineers, Inc.  
3 Park Avenue, New York, NY 10016-5997, USA*

*Copyright © 2001 by the Institute of Electrical and Electronics Engineers, Inc.  
All rights reserved. Published 10 January 2001. Printed in the United States of America.*

*Print: ISBN 0-7381-3104-0 SH94979  
PDF: ISBN 0-7381-3105-9 SS94979*

*No part of this publication may be reproduced in any form, in an electronic retrieval system or otherwise, without the prior written permission of the publisher.*

**IEEE Standards** documents are developed within the IEEE Societies and the Standards Coordinating Committees of the IEEE Standards Association (IEEE-SA) Standards Board. The IEEE develops its standards through a consensus development process, approved by the American National Standards Institute, which brings together volunteers representing varied viewpoints and interests to achieve the final product. Volunteers are not necessarily members of the Institute and serve without compensation. While the IEEE administers the process and establishes rules to promote fairness in the consensus development process, the IEEE does not independently evaluate, test, or verify the accuracy of any of the information contained in its standards.

Use of an IEEE Standard is wholly voluntary. The IEEE disclaims liability for any personal injury, property or other damage, of any nature whatsoever, whether special, indirect, consequential, or compensatory, directly or indirectly resulting from the publication, use of, or reliance upon this, or any other IEEE Standard document.

The IEEE does not warrant or represent the accuracy or content of the material contained herein, and expressly disclaims any express or implied warranty, including any implied warranty of merchantability or fitness for a specific purpose, or that the use of the material contained herein is free from patent infringement. IEEE Standards documents are supplied “**AS IS.**”

The existence of an IEEE Standard does not imply that there are no other ways to produce, test, measure, purchase, market, or provide other goods and services related to the scope of the IEEE Standard. Furthermore, the viewpoint expressed at the time a standard is approved and issued is subject to change brought about through developments in the state of the art and comments received from users of the standard. Every IEEE Standard is subjected to review at least every five years for revision or reaffirmation. When a document is more than five years old and has not been reaffirmed, it is reasonable to conclude that its contents, although still of some value, do not wholly reflect the present state of the art. Users are cautioned to check to determine that they have the latest edition of any IEEE Standard.

In publishing and making this document available, the IEEE is not suggesting or rendering professional or other services for, or on behalf of, any person or entity. Nor is the IEEE undertaking to perform any duty owed by any other person or entity to another. Any person utilizing this, and any other IEEE Standards document, should rely upon the advice of a competent professional in determining the exercise of reasonable care in any given circumstances.

Interpretations: Occasionally questions may arise regarding the meaning of portions of standards as they relate to specific applications. When the need for interpretations is brought to the attention of IEEE, the Institute will initiate action to prepare appropriate responses. Since IEEE Standards represent a consensus of concerned interests, it is important to ensure that any interpretation has also received the concurrence of a balance of interests. For this reason, IEEE and the members of its societies and Standards Coordinating Committees are not able to provide an instant response to interpretation requests except in those cases where the matter has previously received formal consideration.

Comments for revision of IEEE Standards are welcome from any interested party, regardless of membership affiliation with IEEE. Suggestions for changes in documents should be in the form of a proposed change of text, together with appropriate supporting comments. Comments on standards and requests for interpretations should be addressed to:

Secretary, IEEE-SA Standards Board  
445 Hoes Lane  
P.O. Box 1331  
Piscataway, NJ 08855-1331  
USA

Note: Attention is called to the possibility that implementation of this standard may require use of subject matter covered by patent rights. By publication of this standard, no position is taken with respect to the existence or validity of any patent rights in connection therewith. The IEEE shall not be responsible for identifying patents for which a license may be required by an IEEE standard or for conducting inquiries into the legal validity or scope of those patents that are brought to its attention.

Authorization to photocopy portions of any individual standard for internal or personal use is granted by the Institute of Electrical and Electronics Engineers, Inc., provided that the appropriate fee is paid to Copyright Clearance Center. To arrange for payment of licensing fee, please contact Copyright Clearance Center, Customer Service, 222 Rosewood Drive, Danvers, MA 01923 USA; +1 978 750 8400. Permission to photocopy portions of any individual standard for educational classroom use can also be obtained through the Copyright Clearance Center.

## Introduction

(This introduction is not a part of IEEE Std C57.12.59-2001, IEEE Guide for Dry-Type Transformer Through-Fault Current Duration.)

This guide provides recommendations for the application of overcurrent protection devices to limit the exposure time of dry-type transformers to short circuits. It must not be confused with IEEE Std C57.109™-1993, IEEE Guide for Liquid-Immersed Transformer Through-Fault Current Duration, which applies only to liquid-immersed transformers.

Dry-type transformers differ significantly from liquid-immersed types in several respects:

- a) There are five different temperature ratings for dry-type transformers: 75 °C, 90 °C, 115 °C, 130 °C, and 150 °C; whereas there is only one temperature rating for liquid-immersed transformers: 65 °C.
- b) There are significant variations in dry-type winding constructions, including conventional varnish impregnated layered windings, vertically stacked varnish-impregnated disk windings, solid-cast resin windings, and combinations thereof, all of which have different transient heating characteristics during time intervals greater than about 100 s.
- c) The transient heating of liquid-immersed transformer windings are considerably buffered by the insulating medium in which they are immersed, providing a relatively long thermal time constant as compared to dry-type transformers.

Because of the foregoing, the through-fault protection curves for dry-type transformers are limited to overload time intervals of 100 s or less. No one curve for longer time intervals would characterize the thermal performance of all the different dry-type transformer constructions and temperature ratings. Moreover, such curves are not known or, at least, not available. Consequently, the curves in this guide pertain to the temperature rise of the windings during time intervals less than 100 s, wherein nearly all the heat generated is stored in the conductors. For longer time intervals, it is recommended that reference be made to IEEE Std C57.96™-1999, IEEE Guide for Loading Dry-Type Distribution and Power Transformers.

As short-circuit time intervals become progressively less than 100 s, mechanical considerations become more important than thermal characteristics.

Short-circuit performance characteristics are contained in IEEE Std C57.12.01™-1998, IEEE Standard General Requirements for Dry-Type Distribution and Power Transformers Including Those With Solid-Cast and/or Resin-Encapsulated Windings. This guide supplements that information, but in no way supersedes it.

## Participants

At the time this guide was completed, the Working Group for Dry-Type Transformer Through-Fault Current Duration had the following membership:

**Paulette A. Payne, *Chair***

Derek Foster  
Michael E. Haas  
N. Wayne Hansen

Philip J. Hopkinson  
Rush Horton

Charles W. Johnson, Jr.  
Gene Morehart  
Bipin K. Patel

The following members of the balloting committee voted on this standard. Balloters may have voted for approval, disapproval, or abstention.

S. H. Aguirre	Stephen R. Lambert	Carlos O. Peixoto
Jim Antweiler	Donald L. Lowe	Paul Pillitteri
Edward A. Bertolini	Allan Ludbrook	Tom A. Prevost
Thomas E. Blackburn, III	Don MacMillan	Madan Rana
Alain Bolliger	William A. Maguire	Radhakrishna V Rebbapragada
Simon R. Chano	K. T. Massouda	John R. Rossetti
Peter W. Clarke	John W. Matthews	Wes W. Schwartz
Guru Dutt Dhingra	Nigel P. McQuin	Pat Scully
Dieter Dohnal	Joe Melanson	Hyeong Jin Sim
J. C. Duart	Gary L. Michel	James E. Smith
George Gela	Daniel H. Mulkey	Ronald J. Stahara
Randall C. Groves	Arthur S. Neubauer	Frank Stevens
Michael E. Haas	Klaus Papp	Ron W. Stoner
Robert H. Hartgrove	Bipin K. Patel	John C. Sullivan
James D. Huddleston, III	Dhiru S. Patel	Subhash C Tuli
Charles W. Johnson, Jr.	Wesley F. Patterson	Gerald L. Vaughn
Anthony J. Jonnatti	Paulette A. Payne	James W. Wilson
John G. Lackey		William G. Wimmer

When the IEEE-SA Standards Board approved this standard on 6 December 2001, it had the following membership:

**Donald N. Heirman, *Chair***  
**James T. Carlo, *Vice Chair***  
**Judith Gorman, *Secretary***

Satish K. Aggarwal	James H. Gurney	James W. Moore
Mark D. Bowman	Richard J. Holleman	Robert F. Munzner
Gary R. Engmann	Lowell G. Johnson	Ronald C. Petersen
Harold E. Epstein	Robert J. Kennelly	Gerald H. Peterson
H. Landis Floyd	Joseph L. Koepfinger*	John B. Posey
Jay Forster*	Peter H. Lips	Gary S. Robinson
Howard M. Frazier	L. Bruce McClung	Akio Tojo
Ruben D. Garzon	Daleep C. Mohla	Donald W. Zipse

\*Member Emeritus

Also included is the following nonvoting IEEE-SA Standards Board liaison:

Alan Cookson, *NIST Representative*  
Donald R. Volzka, *TAB Representative*

Noelle D. Humenick  
*IEEE Standards Project Editor*

# Contents

1. Overview.....	1
1.1 Scope.....	1
1.2 Purpose.....	1
1.3 General.....	1
2. References.....	2
3. Definitions.....	2
4. Transformer coordination .....	2
4.1 Category I transformers .....	4
4.2 Category II transformers .....	4



# IEEE Guide for Dry-Type Transformer Through-Fault Current Duration

## 1. Overview

### 1.1 Scope

This guide applies to dry-type transformers designated as Category I and Category II in IEEE Std C57.12.01™-1998.<sup>1</sup> Category III transformers have not been included since these are not commonly manufactured and may require special consideration depending on the manufacturer's recommendations.

### 1.2 Purpose

Protective devices, such as relays and fuses, have well-defined operating characteristics that relate fault magnitude to clearing time. It is desirable that these characteristic curves be coordinated with comparable curves applicable to dry-type transformers that relate duration and fault magnitude to withstand capability.

This guide sets forth recommendations believed essential for the application of overcurrent protective devices that limit the exposure time of dry-type transformers to short-circuit currents. This guide is not intended to imply overload capability.

### 1.3 General

The magnitude and duration of fault currents are of utmost importance in establishing a coordinated protection practice for transformers, as both mechanical and thermal effects of fault currents must be considered. For fault-current magnitudes near the maximum short-circuit current rating of the transformer, mechanical effects are more significant than thermal effects. The maximum symmetrical short-circuit current should not exceed 25 times normal base current in accordance with IEEE Std C57.12.01-1998. At lower fault-current magnitudes approaching the overload range, mechanical effects are less important unless the frequency and duration of fault occurrence is high enough to promote mechanical degradation. The point of transition between mechanical concern and thermal concern cannot be precisely defined; mechanical effects tend to have a more prominent role in larger kVA ratings because the mechanical forces are greater.

---

<sup>1</sup>Information on references can be found in Clause 2.



## 2. References

This guide is to be used in conjunction with the following publications. If the following publications are superseded by an approved revision, the revision shall apply.

IEEE C37.91™-2000, IEEE Guide for Protective Relay Applications to Power Transformers.<sup>2,3</sup>

IEEE C57.12.01-1998, IEEE Standard General Requirements for Dry-Type Distribution and Power Transformers Including Those with Solid-Cast and/or Resin-Encapsulated Windings.

IEEE C57.96™-1999, IEEE Guide for Loading Dry-Type Distribution and Power Transformers.

## 3. Definitions

For the purposes of this guide, the following terms and definitions apply. *The Authoritative Dictionary of IEEE Standards Terms* [B1]<sup>4</sup> should be referenced for terms not defined in this clause.

**3.1 normal base current:** Rated current of a transformer corresponding to its rated voltage and rated base kVA.

**3.2 transformer short-circuit impedance:** 1.) For Category I transformers, the transformer expressed in percent of rated voltage and rated base kVA of the transformer. 2.) For Category II transformers, the sum of transformer impedance and system short-circuit impedance at the transformer location, expressed in percent of rated voltage and rated base kVA of the transformer.

## 4. Transformer coordination

For the purposes of coordination of overcurrent protective devices, with transformer short-circuit withstand capability, Figure 1 and Figure 2 are presented as protection curves for Category I and Category II transformers as defined in IEEE Std C57.12.01-1998 and adopted in Table 1.

For Category I, a single curve applies that reflects both thermal and mechanical damage considerations.

For Category II, two curves apply, one of which reflects both thermal and mechanical damage considerations, while the other reflects primarily thermal damage considerations only. On curves that have both a solid and a dotted portion, the solid portion represents a total fault duration beyond which thermal damage to insulation adjacent to current-carrying conductors and anneal-softening of aluminum may occur, while the dotted portion represents a total fault duration beyond which cumulative mechanical damage may occur. The increasing significance of mechanical effects for higher kVA transformers is reflected in these curves. The frequency of faults varies with different transformer applications. Applications characterizing frequent and infrequent faults are presented in the annex of IEEE Std C37.91-2000.


The short-time thermal load capability of dry type transformers is summarized in Table 2.

<sup>2</sup>IEEE Standards or products referred to in Clause 2 are trademarks owned by the Institute of Electrical and Electronics Engineers, Incorporated.

<sup>3</sup>IEEE publications are available from the Institute of Electrical and Electronics Engineers, 445 Hoes Lane, P.O. Box 1331, Piscataway, NJ 08855-1331, USA (<http://standards.ieee.org/>).

<sup>4</sup>The numbers in brackets correspond to those of the bibliography in Annex A.

The validity of these damage-limit curves cannot be demonstrated by test, since the effects are progressive over the transformer lifetime. The curves are based principally on informed engineering judgement and favorable historical field experience.

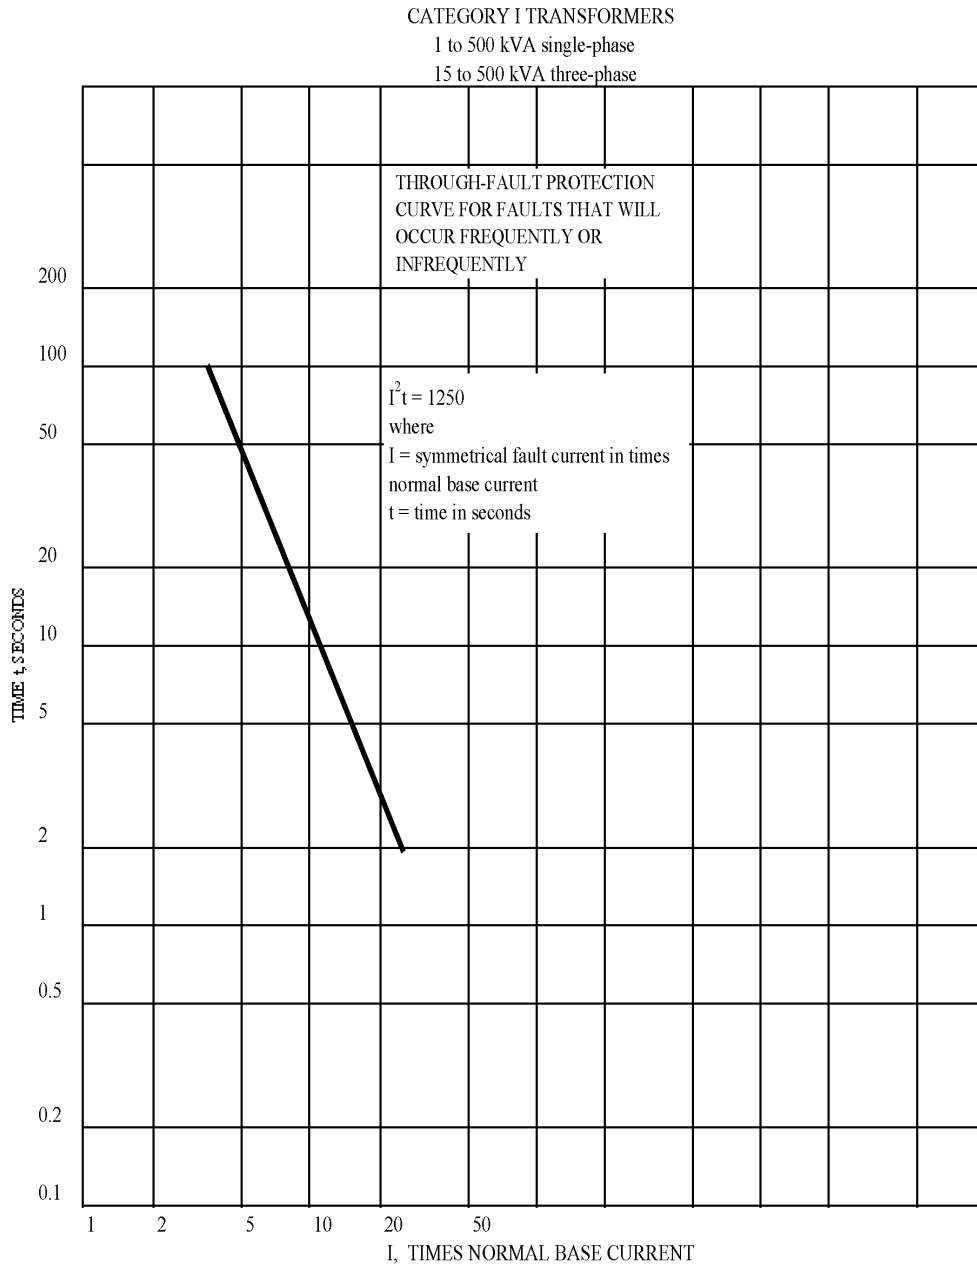

**Figure 1—Category I transformers**

The per-unit short-circuit currents shown in Figure 1 and Figure 2 are the balanced transformer winding currents. The line currents that relate to these winding currents depend upon the transformer connection and the

type of fault present. Application engineers must relate the winding currents to the currents seen by the protective devices in order to protect the transformer within its capability.

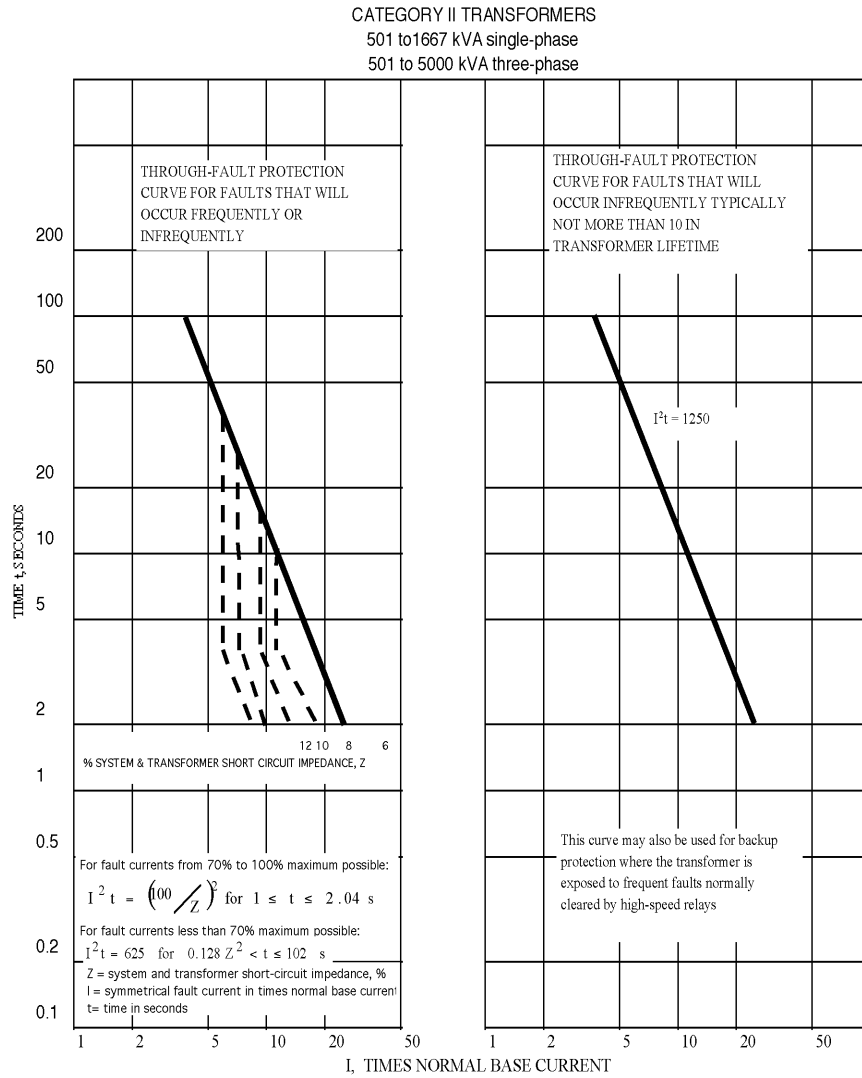


Figure 2—Category II transformers

#### 4.1 Category I transformers

The recommended duration limit is based on the curve in Figure 1. The curve reflects both thermal and mechanical damage considerations and should be applied as a protection curve for faults that will occur frequently or infrequently.

## 4.2 Category II transformers

The recommended duration limits depend upon fault frequency and are based upon the curves in Figure 2. Fault frequency refers to the number of faults with magnitudes greater than 70% of maximum as limited by system and transformer short-circuit impedance.

### 4.2.1 Faults that occur frequently

The left-hand curve, reflecting both thermal and mechanical damage considerations, should be applied as a protection curve for faults that will occur frequently (typically more than 10 in a transformer lifetime). It is dependent upon the short-circuit impedance of the transformer for fault currents above 70% of maximum possible and is keyed to the  $I^2t$  of the worst-case mechanical duty (maximum fault current for 2 s).

### 4.2.2 Faults that occur infrequently

The right-hand curve reflects primarily thermal damage considerations. It is not dependent upon short-circuit impedance of the transformer and may be applied as a protection curve for faults which will occur only infrequently (typically not more than 10 in a transformer lifetime). This curve may also be used for backup protection where the transformer is exposed to frequent faults normally cleared by high-speed relaying.

**Table 1—Transformer categories**

Category <sup>a</sup>	Single-phase (kVA) <sup>b</sup>	Three-phase (kVA) <sup>b</sup>	Reference protection curves
I	1–500	15–500	Figure 1
II	501–1667	501–5000	Figure 2

<sup>a</sup>Category I includes autotransformers of 500 kVA or less (equivalent two-winding) even though nameplate kVA may exceed 500 kVA.

<sup>b</sup>All kilovolt ampere ratings are minimum nameplate kVA for the principal winding.

**Table 2—Transformer short-time thermal load capability**

Transformer category <sup>a</sup>	Time (s) <sup>b</sup>	Times rated current
I	2	25.0
II	2	25.0

<sup>a</sup>For Category II transformers, the maximum through-fault current depends upon the transformer short-circuit impedance.

<sup>b</sup>Refer to IEEE Std C57.96-1999 for loading capabilities at durations longer than 2 s for Category II transformers.

## **Annex A**

(informative)

### **Bibliography**

[B1] IEEE 100, *The Authoritative Dictionary of IEEE Standards Terms*, Seventh Edition.